

# Over Fascia Vents

## 10,000 mm<sup>2</sup> and 25,000 mm<sup>2</sup> Vents

### Description

The Ulti-Mate<sup>®</sup> 10,000 mm<sup>2</sup> and 25,000 mm<sup>2</sup> Over Fascia Vents are designed to be unobtrusive whilst allowing a positive airflow into pitched roof space with ease between the felt and fascia boards in accordance with BS5250. This works for both new builds and re-roofing situations. The FV25 Vents can also be fitted in a flat roof abutment detail.


The two Over Fascia Vents comprise of evenly spaced slot details with specific sizes to prevent access to large insects but wide enough to not to be blocked by debris, paint or water droplets.

### Guidelines for use

Both versions of the Ulti-Mate Over Fascia Vents should be fitted with screws or ring shank nails to the top of the fascia board through the fixing holes to secure the component.

Use alongside other Ulti-Mate roofing products for a more effective roof ventilation system.

Specifications		
	Fascia Vent FV10	Fascia Vent FV25
Product code	ULTI1FV10	ULTI1FV25
Free airflow	10,000 mm <sup>2</sup>	25,000 mm <sup>2</sup>
Unit of measure	60/carton	25/carton
Weight	87 g	162 g
Material	Polypropylene (PP)	
Manufacturing process	Injection moulding	
Colours	Black	

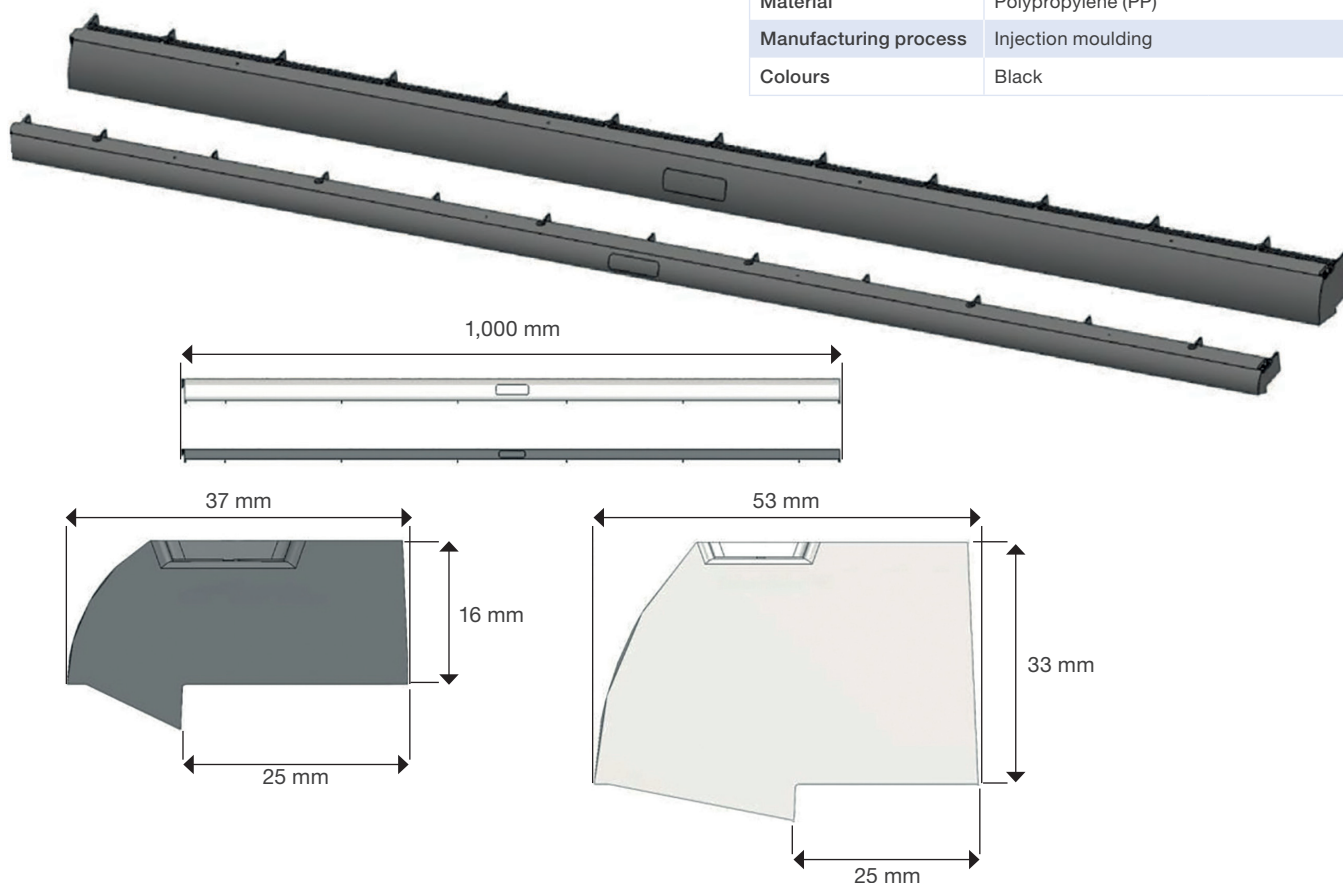

All products are covered by our 15 year Durability Warranty terms and conditions can be found on our website.



All plastic products are made in UK.