




Inside

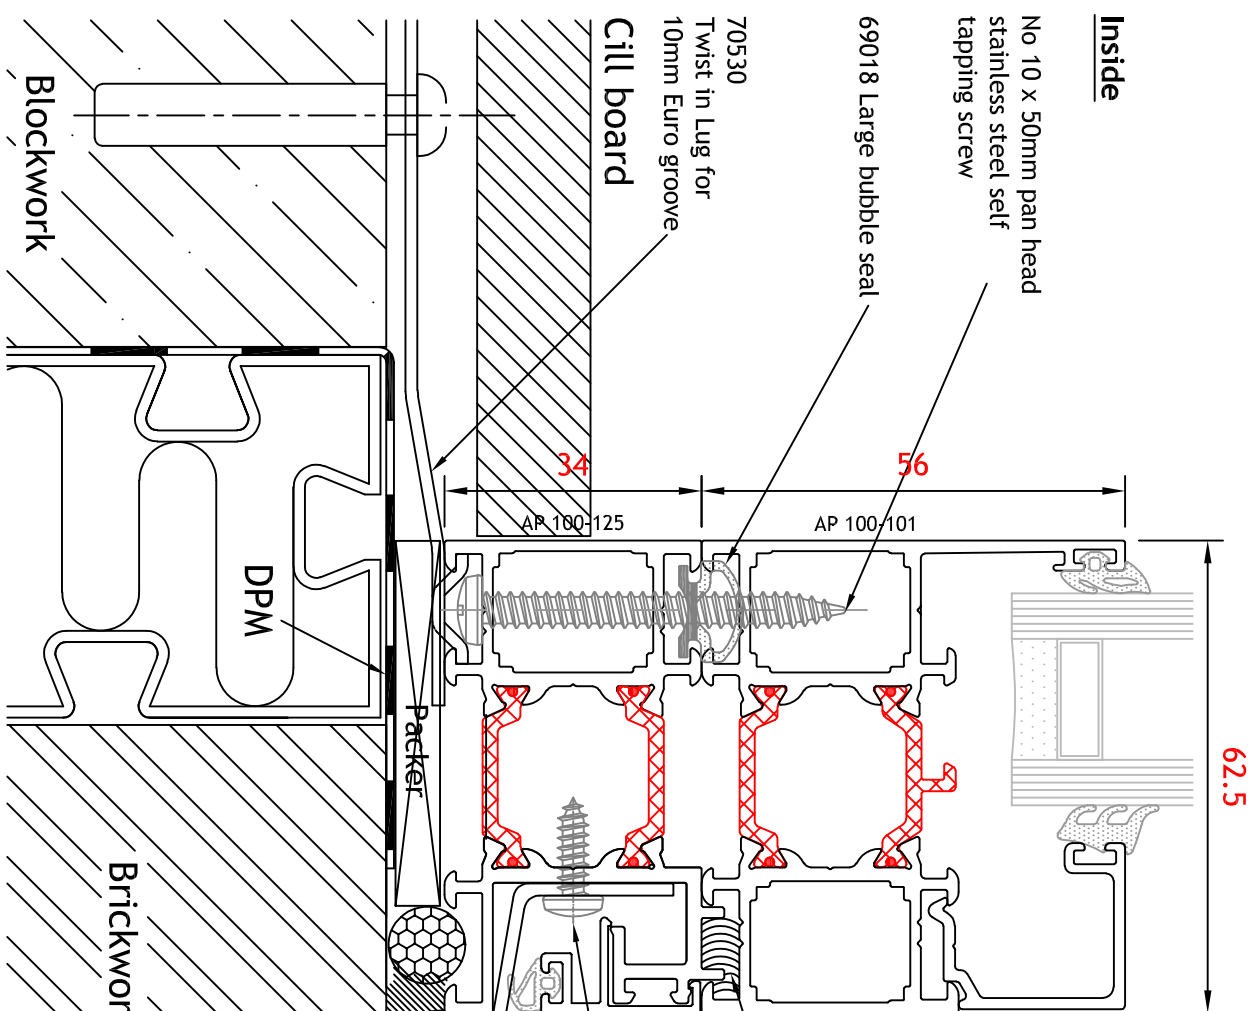

Outside

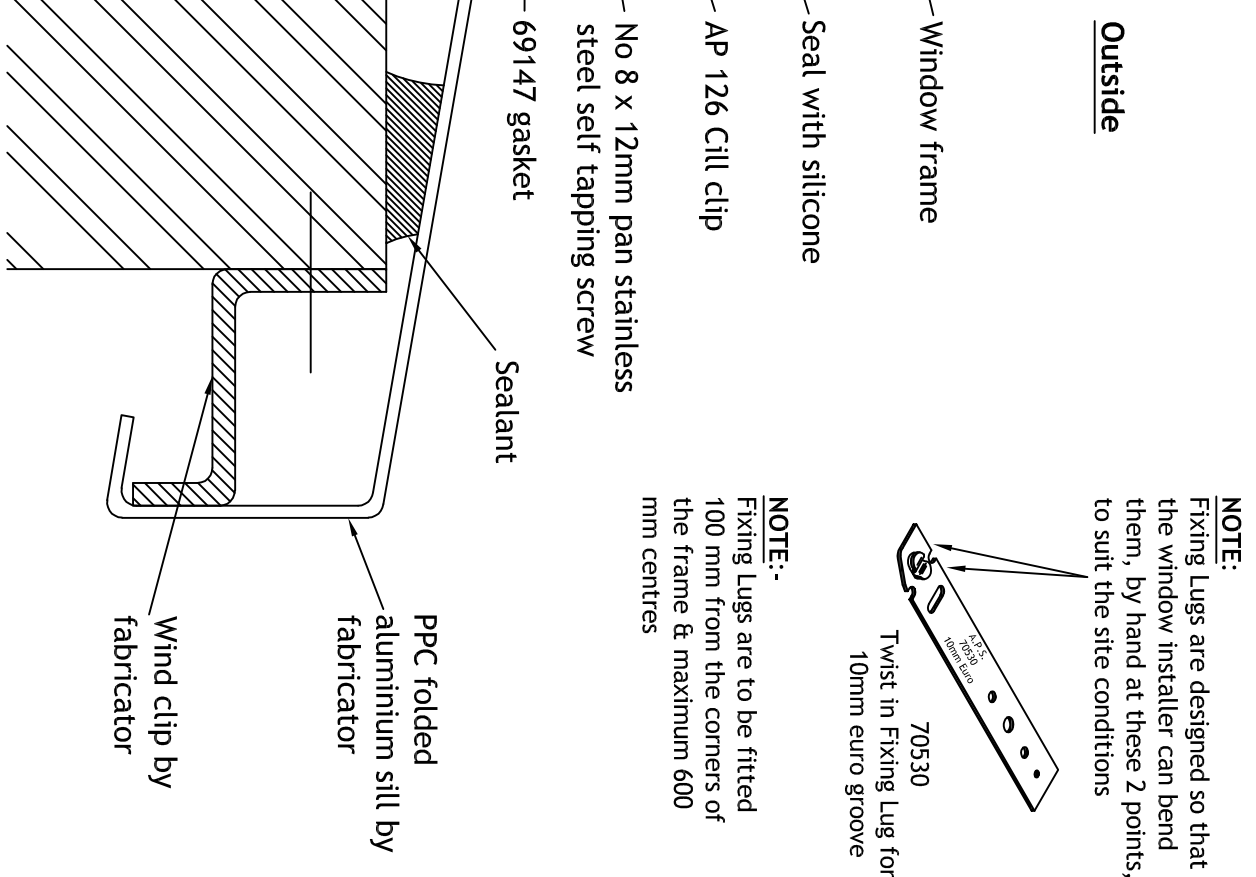

NOTE:-
 Fixing Lugs are designed so that the window installer can bend them, by hand at these 2 points, to suit the site conditions

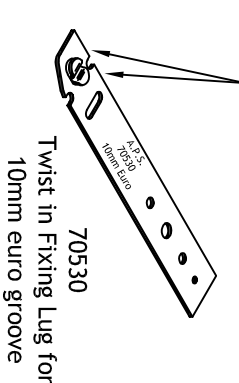

NOTE:-
 Fixing Lugs are to be fitted 100 mm from the corners of the frame & maximum 600 mm centres