


NOTE:
Fixing Lugs are designed so that the window installer can bend them, by hand at these 2 points, to suit the site conditions

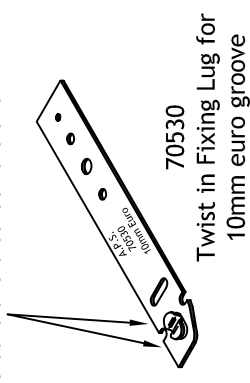

NOTE:-
Fixing Lugs are to be fitted 100 mm from the corners of the frame & maximum 600 mm centres

**Fixed Sill & AP134 100-125 Cill Liner
AP 134 Therm+ Window**

Scale 1:1 Date 01.04.19

Page **AP-4:2:2**

Rev. - Date -