

# L 332(C) - G 332



*Glaze in louvre*

# L 332(C) - G 332



L 332



L 332C



G 332

## Free area

- Physical free area: 33 %
- Visual free area: 55 %

## Specifications

- Extruded sections of aluminium AlMgSi 0,5
- Standard finishes:
  - Silver anodised (15-20 micron)
  - RAL 9010 (60-80 micron) (for UK: hipca white)
- On request: any RAL colour
- Standard stainless steel 18/8 flyscreen: 2 x 2 mm.  
On request : stainless steel 18/8 flyscreen: 6 x 6 mm
- On request: with controllable vents G 332  
Operated with turning plastic knob  
(Optional: operated with a cord)

## Sizes L 332 & G 332

- Blade: 33 mm
- Depth to fit L332: 29 mm – G 332: 37 mm
- Overall flange size: 2 x 21 mm
- All sizes are possible (min. height 200 mm)
- When ordering: Please quote overall width x height

## Sizes L 332C

- Blade: 33 mm
- Depth to fit C331: 28 mm
- Overall flange size: 2 x 21 mm
- Minimum diameter: 300 mm
- Maximum diameter:
  - Silver anodised: 1400 mm
  - RAL colour: 1500 mm
- When ordering: Please quote diameter 'C'


## Fixing

- To be glazed in the window frame
- The use of glazing blocks is recommended


Aralco NVS  
Textielstraat 18a  
8790 Waregem (B)  
T +32 56 52 80 60  
F +32 56 52 80 65  
e-mail: [info@aralco.be](mailto:info@aralco.be)  
web: [www.aralco.be](http://www.aralco.be)




L 332

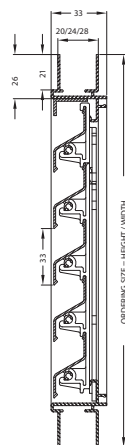

L 332C

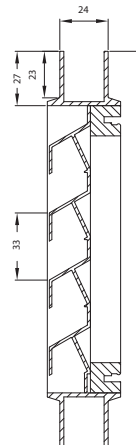

G 332

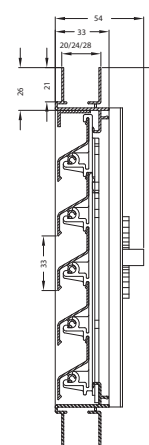

332 - Inbouw

